

Hands Free

While you're listening to your music, you can control your device with the below action on your BH-15 ear phones

| Functions | Operation |
|-------------|-----------------------|
| Volume up | Short press "+"button |
| Volume down | Short press "-"button |
| Last song | Long press "+"button |
| Next song | Long press "-"button |
| Pause | Short press MFB once |
| Play | Short press MFB once |

4

Specifications

version: CSR 8635/V4.1+EDR
profiles: Headset, Hands free, A2DP, AVRCP
Operating distance: 10M
Talk time: 5-7 hours
Standby time: 180 hours
Charging time: about 1.5 hours
Charging Port: Micro USB

Charging


BH-15 comes with a built-in rechargeable battery, prior to using it, it is recommended to charge the battery fully for the first time.

1. Plug another side of cable to the USB port of PC or into a USB power charger
- Red light on: Charging
- Red light off: Finish charging
2. It will takes about 1.5 hours to finish charging


5

USER MANUAL Wireless Headphones

BH-15

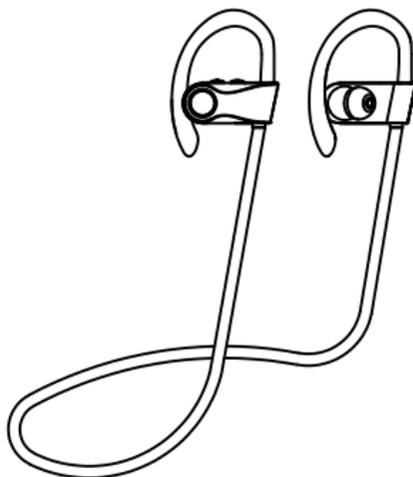

Product Overview

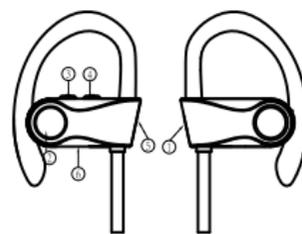

- 1 Microphone
- 2 Multi-Function Buttons
- 3 Volume+/Previous song
- 4 Volume-/Next song
- 5 Indicator light
- 6 USB charging port

Turning On | Off

- Turning on:** Press and hold MFB for 4 seconds until blue LED flashes
- Turning off:** Press and hold MFB button about 4 seconds until red LED flashes

1

Connecting

- 1) Keep your device within 1 meter when pairing;
- 2) Make BH-15 enter pairing mode as shown: Ensure BH-15 is off. Press and hold Multi-Function Button for approximately 8 seconds until red and blue LED flash rapidly ;
- 3) Using your device, please scan /search for available devices select "BH-15" from the list of devices shown;
- 4) If prompted, enter password or PIN No: "0000"
- 5) If prompted by your mobile phone to connect, select "Yes"(this will vary among mobile phone models)
- 6) After successful connecting, blue LED of headset will flashes twice every 4 seconds

Multi-pairing

- BH-15 can connect with two cell phones at the same time. The general pairing procedures are as follows:
- 1) Pairing BH-15 with device A
 - 2) Turn on BH-15 and make it enter pairing mode again, and pairing it with device B
 - 3) Operate device A to connect with headset. BH-15 has already connected with two devices in this moment

2

Hands Free

BH-15 built-in microphone allows you to answer and end calls. Please use the chart below to execute your desired function.

| Functions | Operation |
|----------------------------------|--|
| Cancel a call | Short press MFB once |
| Answer a call | Short press MFB once |
| Reject a call | Long press MFB about 2 seconds until you hear a tone |
| End a call | Short press MFB once |
| Redial the last number | Double click MFB |
| Call transfer (headset to phone) | Press and hold MFB for 2 seconds |
| Call transfer (phone to headset) | Press and hold MFB for 2 seconds |
| Microphone mute | Double click MFB |
| Cancel mute | Double click MFB |

3